

# ZIW17FR

## LED light chain

---



### Contents

Safety instructions and warnings .....	2
Contents of the package .....	3
Technical specifications .....	4
Installation and assembly .....	5
Download the application .....	5
Controls and features .....	8
Troubleshooting FAQ .....	10

## Safety instructions and warnings



Read the operating instructions before using the device.



Observe the safety instructions in this manual.

Do not connect the chain to the power supply while it is in its packaging. The light sources are not replaceable.

Disconnect from the mains when handling.

In case of failure, do not remove the LED bulbs and do not repair the chain!

Do not tamper with the wiring.

Use only with the power supply supplied with the product. Suitable for both indoor and outdoor use.

If the light source breaks or is damaged, the light chain must not be used or left energized, but disposed of safely.


This product is intended for decorative lighting.

This product is not a toy, do not put it in the hands of children!

EMOS Ltd. declares that the product ZIW17FR complies with the essential requirements and other relevant provisions of the directives. The device can be operated freely in the EU.

The device can be operated under general authorisation No. VO-R/12/11.2021-11.

EN EMOS Ltd. hereby declares that the radio equipment type ZIW17FR complies with Directive 2014/53/EU. The full text of the EU Declaration of Conformity is available on the following website <http://www.emos.eu/download>.

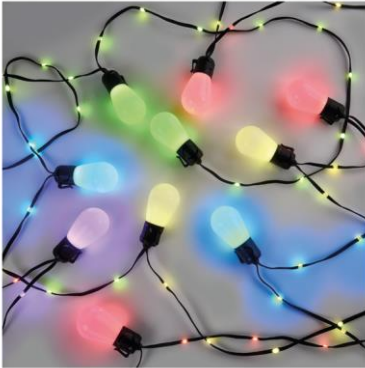

Package  
Contents LED  
Light Chain Adapter  
Driver  
User manual




## Technical Specifications

Model	Protocol	Connection	Number of LEDs	Wattage	Length	Power
ZIW17FR	Wi-Fi	2.4 GHz (Wifi IEEE 802.11b/g/n)	15 pcs	12 W	15 m	100-240 V AC / 5 V DC



## Installation and mounting

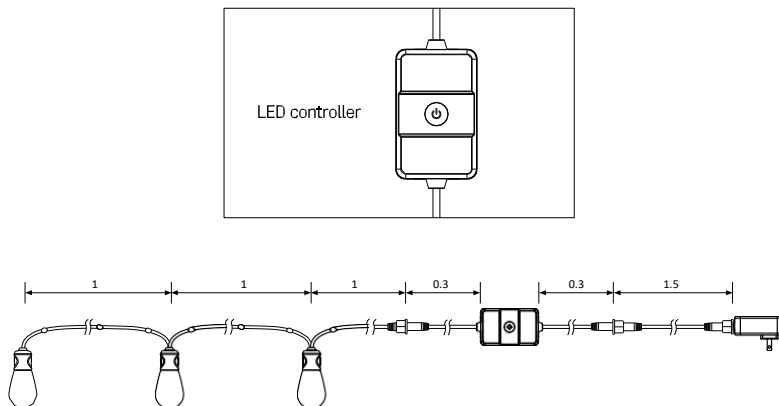


## Download the application

The app is available for Android and iOS via Google Play and the App Store. To download the app, scan the relevant QR code.



## Notice





The LED light chain only supports 2.4 GHz Wifi (does not support 5 GHz).




✓ 2.4 GHz

5 GHz ✗



## EMOS GoSmart mobile app

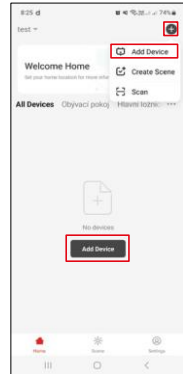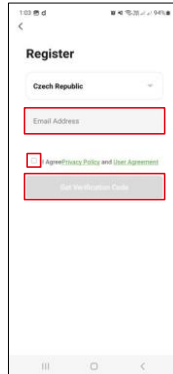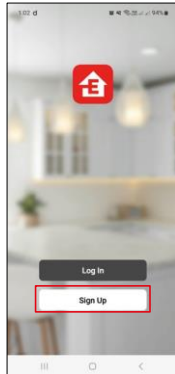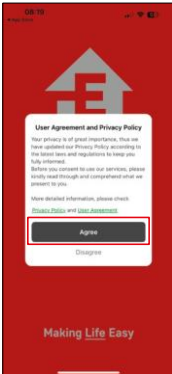


1. Open the EMOS GoSmart app and confirm the Privacy Policy and click "I agree".
2. Select "register".
3. Enter the name of a valid email address and choose a password. Confirm that you agree to the privacy policy. Confirm with the "register" button.
4. Select the "add device" option.

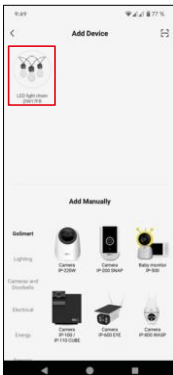

5. Once the device is automatically found, click "add" or select the category and product type.

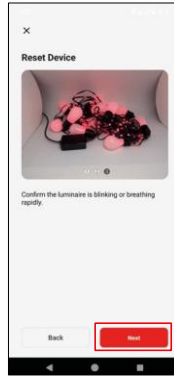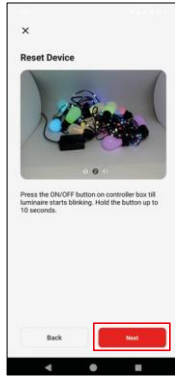


6. Switch on the device and confirm with the "next" button.
7. If the luminaire does not flash, put it into pairing mode by holding the pairing button for a long time (approx. 10 seconds).
8. Confirm that the indicator light is flashing. Confirm with the "next" button.

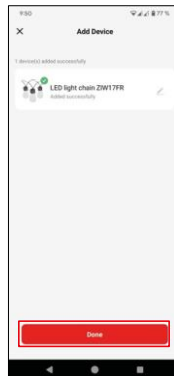


9. Enter the Wifi network name and password. Confirm with the "next" button.
10. Pairing to the device is in progress.
11. The device is successfully paired. Confirm with the "done" button.





## Controls and functions

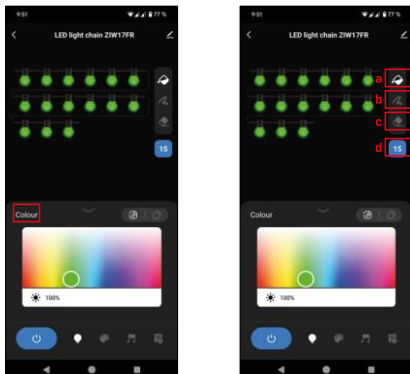

1. Color - "color" is the basic panel for RGB settings.
2. Panel for setting the status of the segments:
  - a. Allows you to set 1 color all the way through.
  - b. It is possible to set the color for each segment separately.
  - c. Option to turn off/on each segment separately.
  - d. Possibility to set the number of segments (default 15, we recommend not to change).

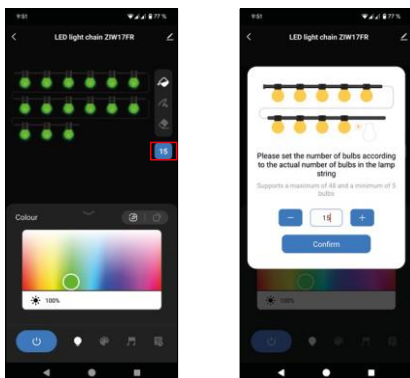

3. Possibility to set the number of segments. Default preset is 15 pcs. It is not recommended to change.

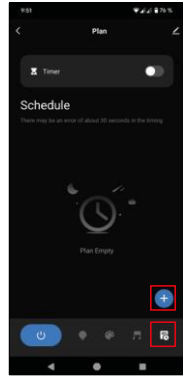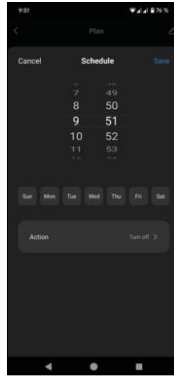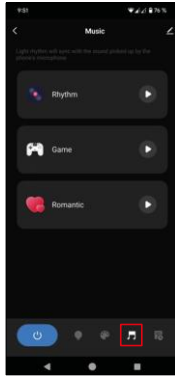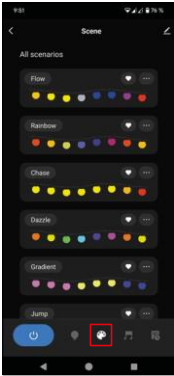

4. Scene - this section is used for setting preset scenes or creating your own scenes.
5. Music - "music" is switching to light mode according to music, when the device reacts to the recorded sound in the mobile device.
6. Plan - "timer" is a function that allows you to set the device to turn on/off after a certain amount of time.

## Troubleshooting FAQ

I am unable to pair my device. What can I do?

- Make sure you are using a 2.4 GHz wifi network and have a strong enough signal.
- Allow the app all permissions in the settings.
- Make sure you're using the latest version of the mobile operating system and the latest version of the app.

I'm not getting notifications, why?

- Enable all permissions in the settings for the app.
- Enable notifications in the app settings (Settings -> App notifications).

Who all can use the device?

- The device must always have an admin (owner).
- The admin can share the device with the rest of the household and assign rights to them.