


GP Batteries

Product Specification

Model no.: GPPB420

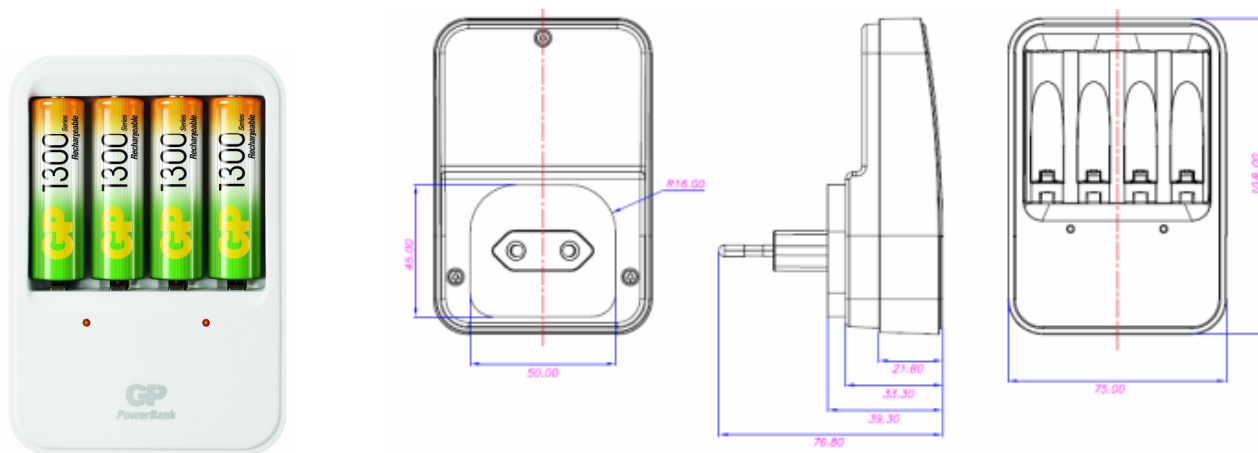

Unit : mm

Product Name	: GP PowerBank GPPB420
Description	: Continuous NiMH Battery Charger (Plug-in Type)
Input Voltage	: 230V AC 50Hz (GS/BS) 120V AC 60Hz (US)
Input Power	: 6W Max.
Application	: For charging 2 or 4 pcs AA / AAA NiMH batteries ; 1 battery per one channel
Output Voltage	: 1.4V DC
Charging Current	: AA 180mA +/- 10%
Output Current	: AAA 180mA +/- 10%
Charging Time	:

Battery Type / Size	Capacity (series / mAh)	Charging Time (hours)
NiMH AA	2100 series ~ 2700 series (min. 2000mAh) ~ (min. 2500mAh)	13.0 ~ 16.0
	1000 series ~ 1800 series (min. 1000mAh) ~ (min. 1800mAh)	6.5 ~ 11.5
NiMH AAA	600 series ~ 1000 series (min. 600mAh) ~ (min. 930mAh)	4.0 ~ 6.5



Member
Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

GP Batteries

Product Specification

Model no.: GPPB420

MTBF : 30000 hours (at ambient temperature 25°C)
Operation Temperature : 0°C to 40°C
Storage Temperature : -20°C to 60°C
LED Indication : 2 x Amber Color LED for two channels ; two channels operate individually

Condition	LED indicator
Charging in Progress	LED on
Batteries Removed	LED off

Dimension : 108 (L) x 75 (W) x 33.3 (H)mm
Weight : 169g (approx)
Approval : PB420GS – GS, CE
PB420BS – CE
PB420US – ETL, FCC
Compliance : RoHS and REACH
Warranty Period : 12 months from ex-factory date



Member
Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.