


H2014:

Aktualizácia sa vykonáva cez počítač, ktorý musí byť v rovnakej sieti.


Samotná aktualizácia:

1. Spustíte v PC program RPT. - PC musí byť v rovnakej sieti, ako je napojený videotelefón
2. Pokiaľ je všetko OK, tak v RPT po kliknutí na „Search“ uvidíte váš prístroj – číselnú adresu 192.168.xxx

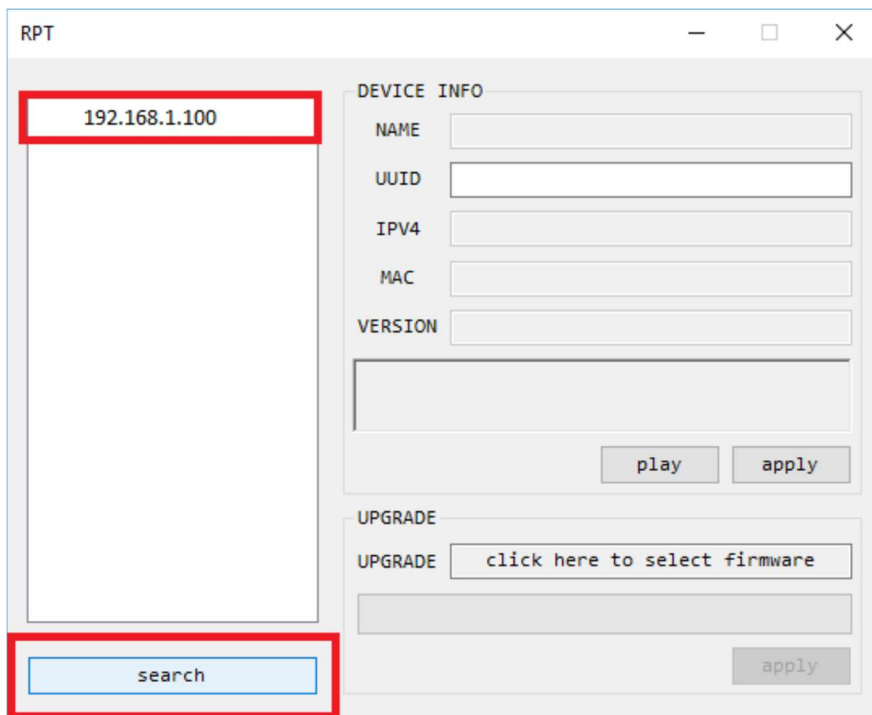

The screenshot shows the RPT software window. On the left, a large empty box is highlighted with a red border. Above it, the IP address '192.168.1.100' is entered in a text field, also highlighted with a red border. Below the large box, a 'search' button is highlighted with a red border. On the right, the 'DEVICE INFO' section contains fields for NAME, UUID, IPV4, MAC, and VERSION. Below these fields are 'play' and 'apply' buttons. The 'UPGRADE' section contains a button labeled 'click here to select firmware' and an 'apply' button at the bottom right.

3. Kliknite na okienko pri nápis „Upgrade“

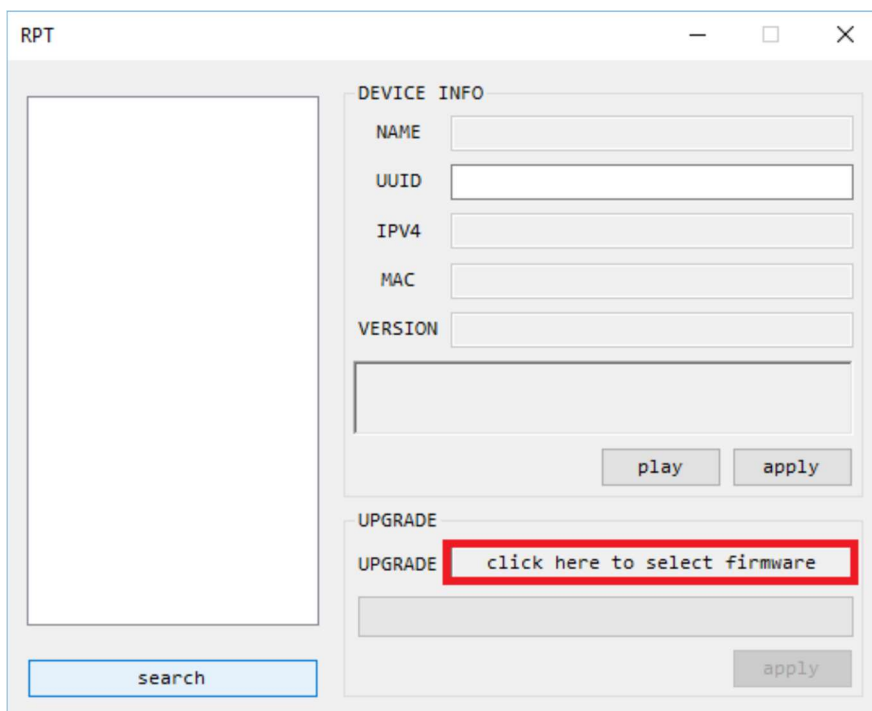


The screenshot shows the RPT software window after the search step. The 'click here to select firmware' button in the 'UPGRADE' section is highlighted with a red border. The 'search' button at the bottom left is also visible. The 'DEVICE INFO' section and its buttons remain the same as in the previous screenshot.

4. Vyberte cestu, kde je uložený aktualizací súbor (súbor je súčasťou balíka)

5. Kliknite na „Apply“

6. Do ničoho nezasahujte a cca minútu sa bude aktualizovať. Stav uvidíte na „teplomeri“, kde bude na zeleno blikať pásik.

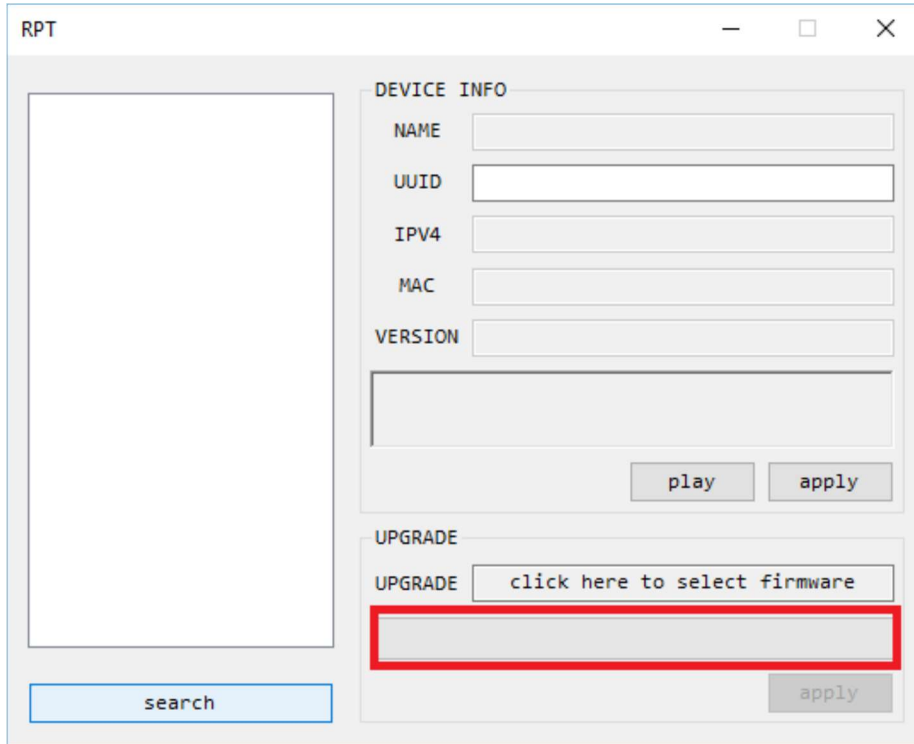

The screenshot shows a window titled "RPT" with a standard Windows-style title bar (minimize, maximize, close). The interface is divided into several sections:

- DEVICE INFO:** A section containing five input fields for "NAME", "UUID", "IPV4", "MAC", and "VERSION". Below these fields is a larger empty text area. At the bottom of this section are two buttons: "play" and "apply".
- UPGRADE:** A section containing a button labeled "UPGRADE" with the text "click here to select firmware" next to it. Below this button is a red rectangular box, which is highlighted in the image.
- Bottom:** A "search" button is located at the bottom left, and another "apply" button is at the bottom right.

7. Po dokončení doporučujem vypnúť a zapnúť napájanie.

Ďalej je možné preveriť u poskytovateľa, či neblokuje nejaké komunikačné porty.

Prístroj využíva porty: (udp,tcp) 80, 8080, 8000, 443, 21047 (tieto musia byť otvorené a priechodné).

Pri bezdrôtovom spojení musí byť Wifi v pásme 2,4GHz a štandardne zabezpečená.